



Designated according to The Construction Products (Amendment etc.) (EU Exit) Regulations 2020

UK Technical Assessment	UKTA-0836-22/6149 of 11/07/2022
Technical Assessment Body issuing the UK Technical Assessment:	British Board of Agrément
Trade name of the construction product:	JORDAHL anchor channel JTA and JXA
Product family to which the construction product belongs:	Anchor channels
Manufacturer:	PohlCon GmbH Nobelstrasse 51 12057 Berlin Germany
Manufacturing plant(s):	PohlCon GmbH Industriestrasse 5 14959 Trebbin Germany
This UK Technical Assessment contains:	50 pages including 3 annexes which form an integral part of this assessment
This UK Technical Assessment is issued in accordance with The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 on the basis of:	EAD 330008-03-0601, Edition 03/2021 <i>Anchor channels</i>

Communication of this UK Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of the British Board of Agrément. Any partial reproduction must be identified as such.

1 Technical description of the product

The JORDAHL anchor channel JTA and JXA is system consisting of C-shaped channel profile steel and stainless steel and at least two metal anchors non-detachably fixed on the channel back and channel bolts.

The anchor channel is embedded surface-flush in the concrete.

Channel bolts JORDAHL T-bolts with appropriate hexagon nuts and washers are fixed to the channel.

The product full description is given in Annex A.

2 Specification of the intended use(s) in accordance with the applicable UK Assessment Document (hereinafter UKAD)

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under tension load (static and quasi-static loading)	
- Resistance to steel failure of anchors, connection, and channel lips	See Annex C1 to C3
- Resistance to steel failure of channel bolt	See Annex C6
- Resistance to steel failure by exceeding the bending strength of the channel	See Annex A9, A10 and C4 to C5
- Maximum installation torque	See Annex B5 and B6
- Resistance to pull-out failure of the anchor and to concrete cone failure	See Annex B3, B4 and C7 to C9
- Minimum edge distance, spacing and member thickness	See Annex A9, A10, B3 and B4
- Characteristic edge distance and spacing to avoid splitting of concrete under load	See Annex C7 to C9
- Resistance to blow-out failure – bearing area of anchor head	See Annex A7 and A8
Characteristic resistance under shear load (static and quasi-static loading)	
- Resistance to steel failure of channel bolt	See Annex C16
- Resistance to steel failure of channel lips, connection, and anchor (shear load perpendicular to longitudinal axis of channel)	See Annex C11 to C13
- Resistance to steel failure of channel lips, anchor, and connection (shear load in direction of longitudinal axis of channel)	See Annex C12

Essential characteristic	Performance
- Resistance to concrete failure	See Annex C14 and C15
Characteristic resistance under combined tension and shear load (static and quasi-static load)	See Annex C18
Characteristic resistances under cyclic fatigue tension load	See Annex C22 and C23
Displacements (static and quasi-static load)	See Annex C10 and C17

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C19 to C21

3.3 Health, hygiene, and the environment (BWR 3)

Not relevant

3.4 Safety and accessibility in use (BWR 4)

Not relevant

3.5 Protection against noise (BWR 5)

Not relevant

3.6 Energy economy and heat retention (BWR 6)

Not relevant

3.7 Sustainable use of natural resources (BWR 7)

No performance assessed.

3.8 Other essential characteristics

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied

4.1 System of assessment and verification of constancy of performance

According to UKAD No. 330008-03-0601 and Annex V of the Construction Products Regulation (Regulation (EU) 305/2011 as brought into UK law and amended, the system to be applied is: 1.

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable UKAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

5.1 UKCA marking for the product/ system must contain the following information:

- Identification number of the Approved Body
- Name/address of the manufacturer of the product/ system
- Marking with intention of clarification of intended use
- Date of marking
- Number of certificate of constancy of performance
- UKTA number.

On behalf of the British Board of Agrément



Date of Issue: 11 July 2022

Hardy Giesler
Chief Executive Officer




British Board of Agrément,
Bucknalls Lane,
Watford,
Hertfordshire
WD25 9BA

ANNEXES

These annexes apply to the product described in the main body of the UK Technical Assessment.

Annex A	Product description
Annex A1	Installed condition
Annex A2	Marking and materials
Annex A3	Materials and intended use
Annex A4	Materials and intended use
Annex A5	Types of channels – carbon steel
Annex A6	Types of channels – stainless steel
Annex A7	Types of anchors – round anchors
Annex A8	Types of anchors – I-anchors and T-anchors
Annex A9	Anchor positioning and channel length (JTA W and JTA K)
Annex A10	Anchor positioning and channel length (JXA)
Annex A11	Types of channel bolts – geometry
Annex A12	Types of channel bolts – material
Annex B	Intended use
Annex B1	Specifications
Annex B2	Specifications
Annex B3	Installation parameters of anchor channels (JTA W)
Annex B4	Installation parameters of anchor channels (JXA and JTA K)
Annex B5	Installation parameters of channel bolts (for JTA W and JTA K)
Annex B6	Installation parameters of channel bolts (for JXA)
Annex B7	Position of the fixture
Annex B8	Installation instruction anchor channels
Annex B9	Installation instruction channel bolts
Annex C	Performance
Annex C1	Characteristic resistances under tension load – steel failure anchor channels (JTA W)
Annex C2	Characteristic resistances under tension load – steel failure anchor channels (JXA)
Annex C3	Characteristic resistances under tension load – steel failure anchor channels (JTA K)
Annex C4	Characteristic resistances under tension load – steel failure anchor channels (JTA W and JXA)
Annex C5	Characteristic resistances under tension load – steel failure anchor channels (JTA K)
Annex C6	Characteristic resistances under tension load – steel failure anchor channel bolts
Annex C7	Characteristic resistances under tension load – concrete failure anchor channels (JTA W)
Annex C8	Characteristic resistances under tension load – concrete failure anchor channels (JXA)
Annex C9	Characteristic resistances under tension load – concrete failure anchor channels (JTA K)
Annex C10	Displacement under tension load
Annex C11	Characteristic resistances under shear load – steel failure anchor channels (JTA W)
Annex C12	Characteristic resistances under shear load – steel failure anchor channels (JXA)
Annex C13	Characteristic resistances under shear load – steel failure anchor channels (JTA K)
Annex C14	Characteristic resistances under shear load – steel failure anchor channels (JTA W and JXA)
Annex C15	Characteristic resistances under shear load – steel failure anchor channels (JTA K)
Annex C16	Characteristic resistances under shear load – steel failure anchor channel bolts
Annex C17	Displacement under shear load
Annex C18	Characteristic resistances under combined tension and shear load
Annex C19	Characteristic resistances under fire exposure
Annex C20	Characteristic resistances under fire exposure
Annex C21	Concrete cover under fire exposure
Annex C22	Characteristic resistances under fatigue tension load – Design method I
Annex C23	Characteristic resistances under fatigue tension load – Design method II

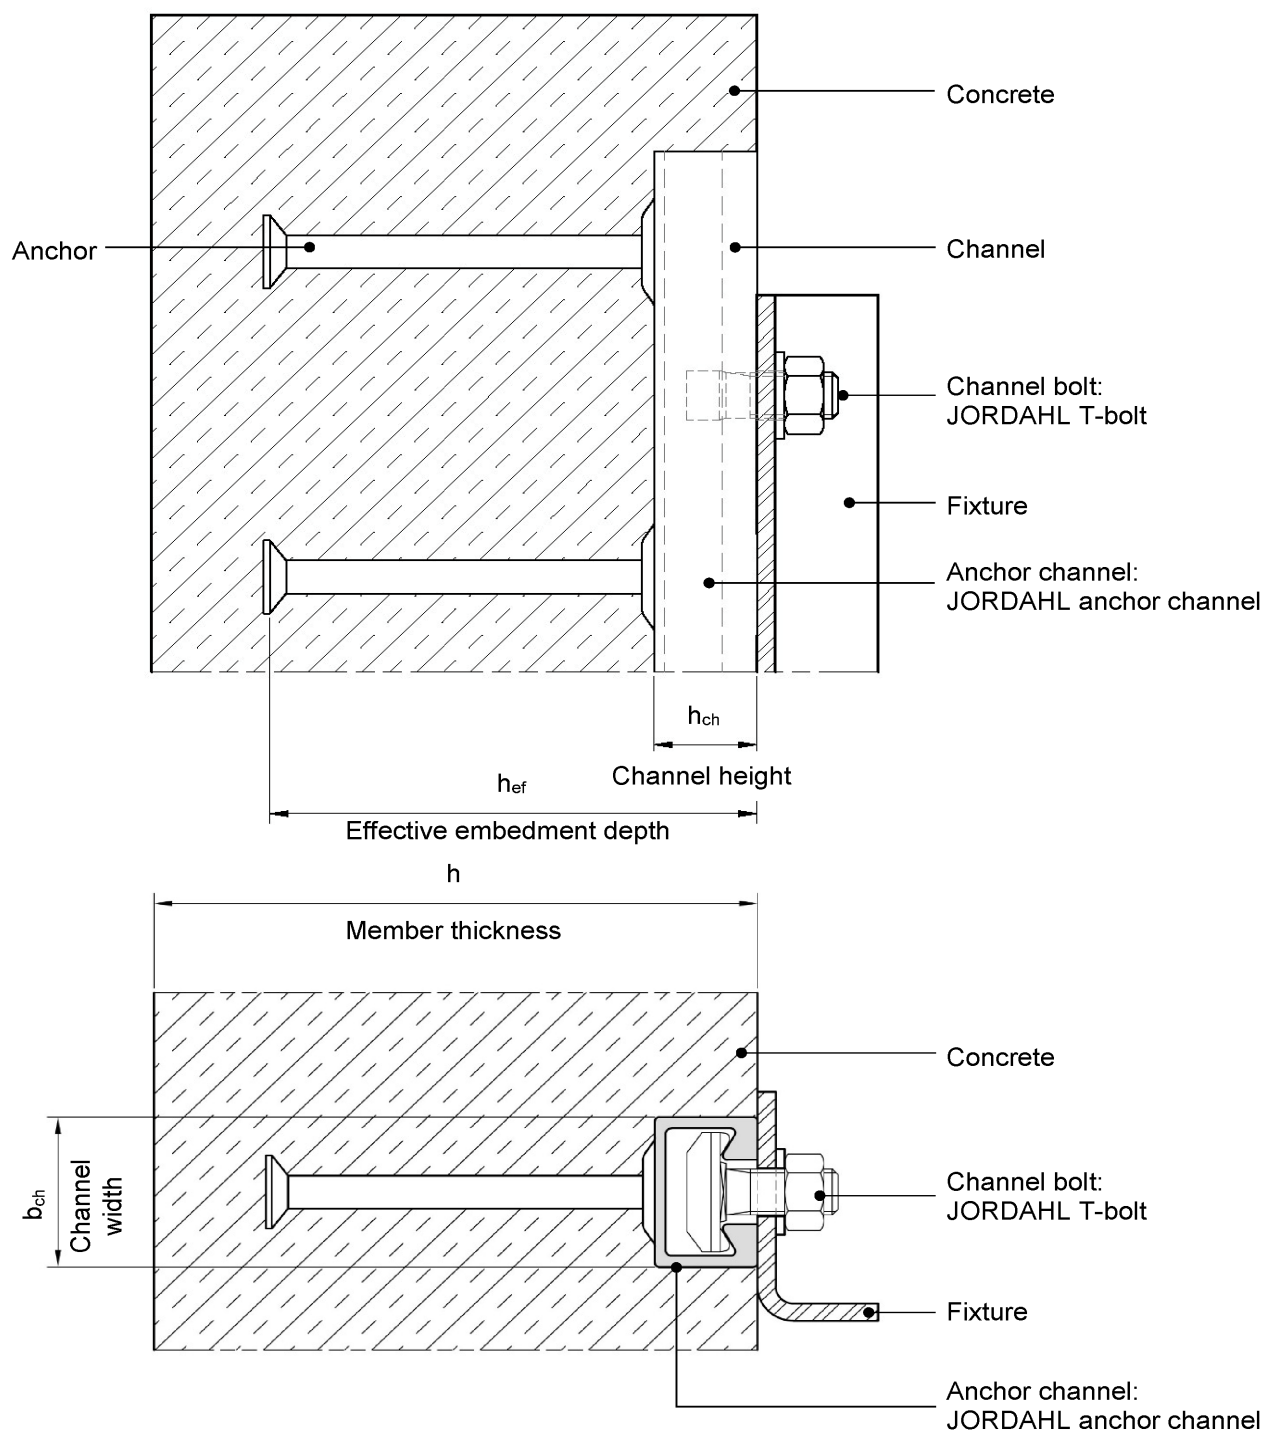

JORDAHL anchor channel JTA and JXA

Product description
Installed condition

Annex A1

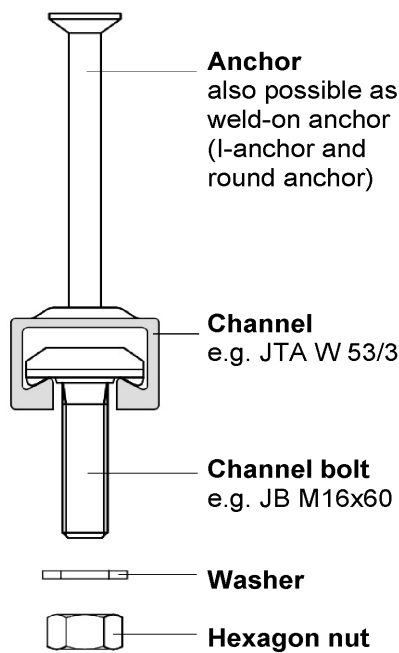
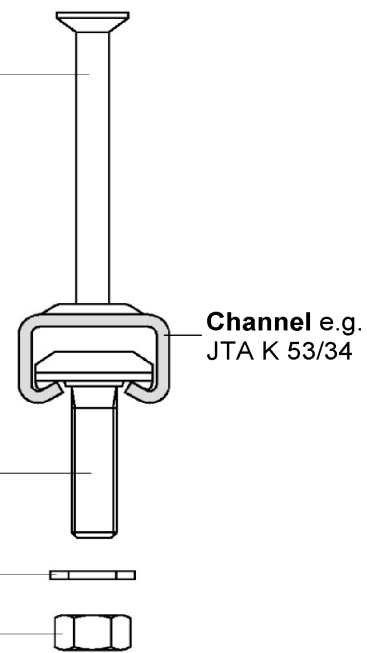
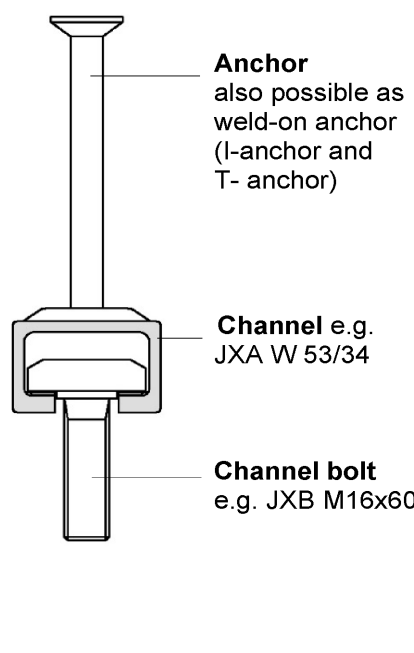

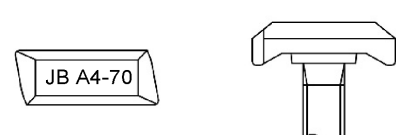
<p>JORDAHL anchor channel JTA with W profile</p>  <p>Anchor also possible as weld-on anchor (I-anchor and round anchor)</p> <p>Channel e.g. JTA W 53/34</p> <p>Channel bolt e.g. JB M16x60</p> <p>Washer</p> <p>Hexagon nut</p>		<p>JORDAHL anchor channel JXA with K profile</p>  <p>Anchor also possible as weld-on anchor (I-anchor and T-anchor)</p> <p>Channel e.g. JTA K 53/34</p> <p>Channel bolt e.g. JB M16x60</p> <p>Washer</p> <p>Hexagon nut</p>		<p>JORDAHL anchor channel JXA with serrated W profile</p>  <p>Anchor also possible as weld-on anchor (I-anchor and T-anchor)</p> <p>Channel e.g. JXA W 53/34</p> <p>Channel bolt e.g. JXB M16x60</p> <p>Washer</p> <p>Hexagon nut</p>	
<p>Example of marking of the JORDAHL anchor channels JTA and JXA: e.g. JXA W53/34 A4</p>  <p>JXA W53/34 A4 105</p> <p>J or JORDAHL = Identifying mark of the manufacturer JXA W = Anchor channel type 53/34 = Size A4 = Material 105 = Embedment depth if $h_{ef} > h_{ef,min}$</p> <p>Material channels: <u>Carbon steel</u> No marking = Hot-dip galvanized</p> <p><u>Stainless steel</u> A2 = CRC II ¹⁾ A4, L4 = CRC III ¹⁾ F4, FA = CRC III ¹⁾ HCR = CRC IV, V ¹⁾</p> <p>¹⁾ Corrosion resistance class</p> <p>Close to the anchors a nail hole is positioned</p>			<p>Example of marking of the JORDAHL T-bolt: e.g. JB A4-70</p>  <p>JB A4-70</p> <p>J or JORDAHL = Identifying mark of the manufacturer JB = Channel bolt type A4 = Material 70 = Strength grade</p> <p>Material bolts: <u>Carbon steel</u> No marking = Hot-dip galvanized G = Electroplated</p> <p><u>Stainless steel</u> A2 = CRCII ¹⁾ A4, L4 = CRCIII ¹⁾ F4, FA = CRC III ¹⁾ HCR = CRC IV,V ¹⁾</p> <p>Strength grade bolts: <u>Carbon steel</u> 4,6, 8,8 = Strength grade 4,6, 8,8 <u>Stainless steel</u> 50, 70 = Strength grade 50, 70</p>		
<p>JORDAHL anchor channel JTA and JXA</p>					
<p>Product description Marking and materials</p>					<p>Annex A2</p>

Table A1: Materials and intended use

Item no.	Specification	Intended use	
		1	2
		Anchor channels may only be used in structures subject to dry internal conditions	Anchor channels may also be used in structures subject to internal conditions with usual humidity
		Materials	
1	Channel profile	Carbon steel hot-dip galvanized $\geq 55 \mu\text{m}$ ⁴⁾	Carbon steel hot-dip galvanized $\geq 55 \mu\text{m}$ ⁴⁾
			Stainless steel ⁵⁾ CRC II
2	Anchor	Carbon steel hot-dip galvanized $\geq 55 \mu\text{m}$ ⁴⁾	Carbon steel hot-dip galvanized $\geq 55 \mu\text{m}$ ⁴⁾
			Stainless steel ⁵⁾ CRC II
3	Channel bolt with shaft and thread according to BS EN ISO 4018:2011	Carbon steel strength grade 4.6, 8.8 electroplated $\geq 5 \mu\text{m}$ ²⁾	Carbon steel strength grade 4.6, 8.8 hot-dip galvanized $\geq 50 \mu\text{m}$ ³⁾
			Stainless steel ⁵⁾ CRC II strength grade 50, 70
4	Washer according to BS EN ISO 7089: 2000 and BS EN ISO 7093-1: 2000, prod. class A, 200 HV	Carbon steel electroplated $\geq 5 \mu\text{m}$ ²⁾	Carbon steel hot-dip galvanized $\geq 50 \mu\text{m}$ ³⁾
			Stainless steel ⁵⁾ steel type A2, A3, A4
5	Hexagonal nut BS EN ISO 4032: 2012	Carbon steel strength grade 5, 8 electroplated $\geq 5 \mu\text{m}$ ²⁾	Carbon steel strength grade 5, 8 hot-dip galvanized $\geq 50 \mu\text{m}$ ³⁾
			Stainless steel ⁵⁾ steel type A2, A3, A4 strength grade 70, 80

¹⁾ Carbon steel only for welded anchors, with sufficient concrete cover according to BS EN 1992-1-1: 2004 + A1: 2014 ($C_{\text{nom}} \geq 50\text{mm}$)

²⁾ Electroplated according to BS EN ISO 4042: 2018

³⁾ Hot dip galvanized according to BS EN ISO 10684: 2004 + AC: 2009

⁴⁾ Hot dip galvanized on the basis of BS EN ISO 1461: 2009, but coating thickness $\geq 55 \mu\text{m}$

⁵⁾ Stainless steel anchors only in combination with stainless steel channels, bolts, washers, and nuts

JORDAHL anchor channel JTA and JXA

Product description
Materials and intended use

Annex A3

Table A1 (continuation): Materials and intended use

Item no.	Specification	Intended use		
		3	4	5
		For CRC III according to BS EN 1993-1-4: 2006 + A2: 2020	For CRC IV according to BS EN 1993-1-4: 2006 + A2: 2020	For CRC V according to BS EN 1993-1-4: 2006 + A2: 2020
		Materials		
1	Channel profile	Stainless steel CRC III	Stainless steel CRC IV	Stainless steel CRC V
2	Anchor	Stainless steel CRC III	Stainless steel CRC IV	Stainless steel CRC V
		Carbon steel ¹⁾	Carbon steel ¹⁾	
3	Channel bolt with shaft and thread according to BS EN ISO 4018:2011	Stainless steel CRC III strength grade 50, 70	Stainless steel CRC IV strength grade 50, 70	Stainless steel CRC V strength grade 50, 70
4	Washer according to BS EN ISO 7089: 2000 and BS EN ISO 7093-1: 2000, prod. class A, 200 HV	Stainless steel CRC III steel type A4	Stainless steel CRC IV steel type A5	Stainless steel CRC V steel type A8
5	Hexagonal nut BS EN ISO 4032: 2012	Stainless steel CRC III steel type A4 strength grade 70, 80	Stainless steel CRC IV steel type A5 strength grade 70, 80	Stainless steel CRC V steel type A8 strength grade 70, 80

¹⁾ Carbon steel only for welded anchors, with sufficient concrete cover according to BS EN 1992-1-1: 2004 + A1: 2014 ($C_{nom} \geq 50\text{mm}$)

²⁾ Electroplated according to BS EN ISO 4042: 2018

³⁾ Hot dip galvanized according to BS EN ISO 10684: 2004 + AC: 2009

⁴⁾ Hot dip galvanized on the basis of BS EN ISO 1461: 2009, but coating thickness $\geq 55 \mu\text{m}$

⁵⁾ Stainless steel anchors only in combination with stainless steel channels, bolts, washers, and nuts

JORDAHL anchor channel JTA and JXA

Product description
Materials and intended use

Annex A4

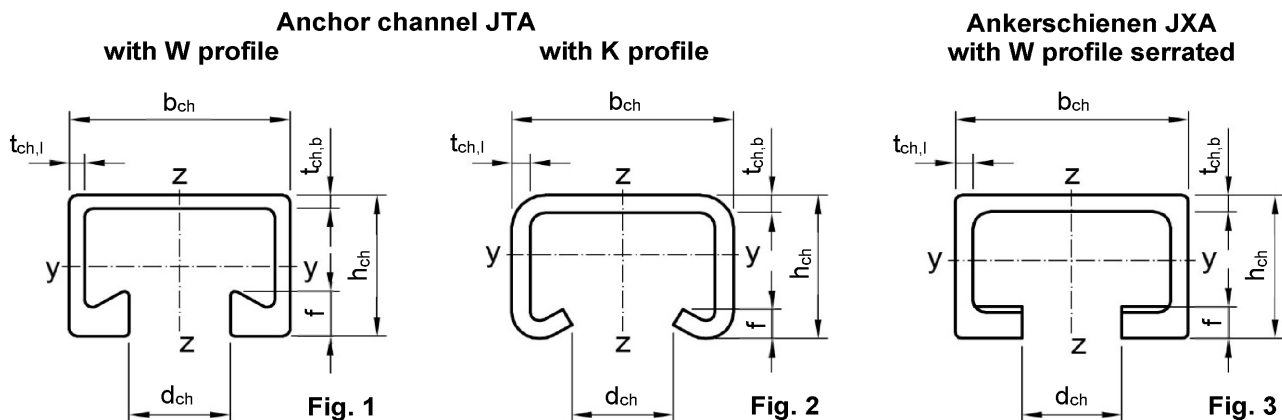


Table A2: Dimensions of profile – carbon steel

Anchor channel		Fig.	Material	Dimension [mm]						[mm ⁴]
				b _{ch}	h _{ch}	t _{ch,b}	t _{ch,l}	d _{ch}	f	
JTA	K 28/15	2	Carbon steel	28,00	15,25	2,25	2,25	12,00	2,25	4060
	K 38/17	2		38,00	17,50	3,00	3,00	18,00	3,00	8547
	K 40/25	2		40,00	25,00	2,75	2,75	18,00	5,60	20570
	K 50/30	2		50,00	30,00	3,00	3,00	22,00	7,39	41827
	K 53/34	2		53,50	33,00	4,50	4,50	22,00	7,90	72079
	K 72/48	2		72,00	49,00	6,00	6,00	33,00	9,90	293579
	W 40/22 W 40+	1		39,50	23,00	2,60	2,40	18,00	6,00	20029
	W 50/30 W 50+	1		49,00	30,00	3,20	2,75	22,50	7,85	52896
	W 53/34	1		52,50	33,50	4,10	4,00	22,50	10,50	93262
	W 55/42	1		54,50	42,00	5,00	5,00	26,00	12,90	187464
	W 72/48	1		72,00	48,50	4,50	5,00	33,00	15,50	349721
JXA	W 38/23	3	Carbon steel	38,00	23,00	3,50	3,00	18,00	4,00	20953
	W 53/34	3		52,50	34,00	4,00	4,00	22,50	6,00	92910

JORDAHL anchor channel JTA and JXA

Product description
Types of channels – carbon steel

Annex A5

Table A3: Dimensions of profile – stainless steel

Anchor channel		Fig. ¹⁾	Material	Dimension [mm]						[mm ⁴]
				b _{ch}	h _{ch}	t _{ch,b}	t _{ch,l}	d _{ch}	f	I _y
JTA	K 28/15	2	Stainless steel	28,00	15,25	2,25	2,25	12,00	2,25	4060
	K 38/17	2		38,00	17,50	3,00	3,00	18,00	3,00	8547
	K 40/25	2		39,50	25,00	2,50	2,50	18,00	5,40	19097
	K 50/30	2		50,00	30,00	3,00	3,00	22,00	7,39	41827
	K 53/34	2		53,50	33,00	4,50	4,50	22,00	7,90	72079
	K 72/48	2		72,00	49,00	6,00	6,00	33,00	9,90	293579
	W 40/22 W 40+	1		39,50	23,00	2,60	2,40	18,00	6,00	20029
	W 50/30 W 50+	1		49,00	30,00	3,20	2,75	22,50	7,85	52896
	W 53/34	1		52,50	33,50	4,10	4,00	22,50	10,50	93262
	W 72/48	1		72,00	48,50	4,50	5,00	33,00	15,50	349721


¹⁾ Fig. according to Annex A5

JORDAHL anchor channel JTA and JXA

Product description
Types of channels – stainless steel

Annex A6

Round anchor ¹⁾

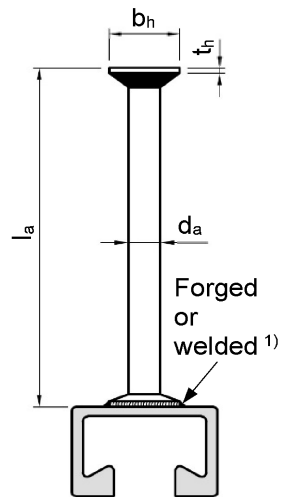

¹⁾ Only anchor channel JTA: welded anchors


Table A4: Dimensions of round anchors

Anchor channel		Type	d _a [mm]	d _h [mm]	t _h [mm]	A _h [mm ²]	l _{a,min} [mm]
JTA	K 28/15	R	7,0	12,0	2,0	74,6	31,8
	W 40/22, K 40/25		8,5	15,0	2,0	120,0	56,0
	W 40+						70,0
	K 38/17		9,0	17,0	3,0	163,4	61,5
	W 40/22, K 40/25						57,0
	W 50/30, K 50/30		9,0	17,5	3,0	176,9	67,0
	W 50+		10,0	19,5	3,0	220,1	79,0
	W 40+		10,8	19,0	3,0	191,9	71,0
	W 50/30, K 50/30						67,0
	W 53/34, K 53/34		11,5	23,5	3,0	329,9	124,5
	W 55/42		15,5	28,0	3,5	427,1	136,5
	W 72/48, K 72/48		15,5	31,0	3,5	566,1	133,5
JXA	W 38/23		10,0	19,5	3,0	220,1	79,0
	W 53/34		11,5	23,5	3,0	329,9	124,5

JORDAHL anchor channel JTA and JXA

Product description
Types of anchors – round anchors

Annex A7

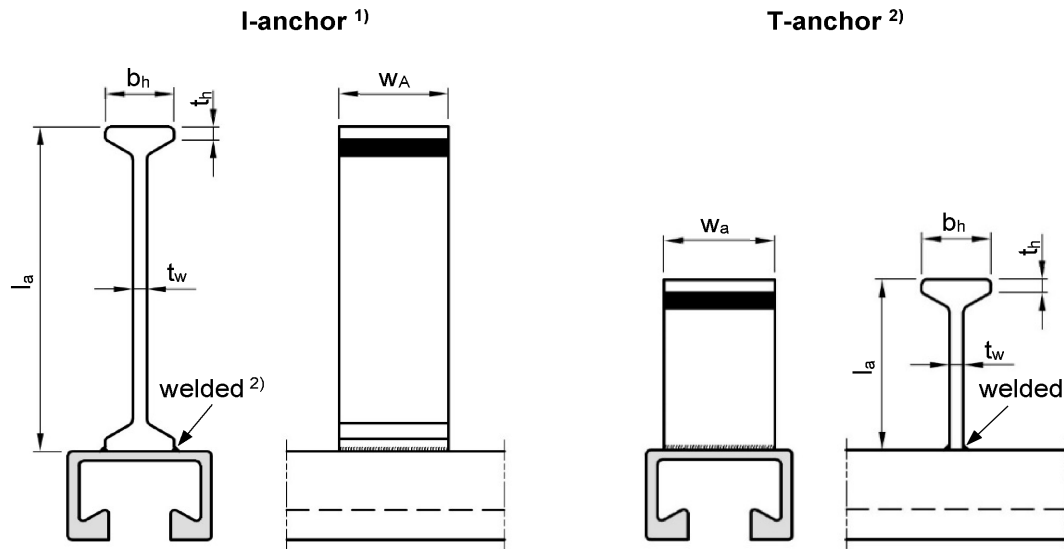

1) Only anchor channel JTA: different welding and anchor orientation possible, refer to Annex A9

2) Only anchor channel JXA

Table A5: Dimensions of I-anchors and T-anchors

Anchor channel		Type	w _a [mm]	b _h [mm]	t _w [mm]	t _h [mm]	A _h [mm ²]	l _{a,min} [mm]
JTA	K 28/15, K 38/17	I 60	10	18,0	5,0	3,3	130	62
	W40/22, K 40/25		12				234	62
	W 50/30, K 50/30	I 69	18	18,0	5,0	3,5	234	69
	W 40+	I 128	20	17,0	6,0	5,0	220	128
	W 50+		25				275	128
	W 53/34, K 53/34		26				286	128
	W 40+	I 140	20	20,0	7,1	6,0	258	140
	W 50+		25				322	140
	W 55/42		32				448	140
	W 72/48, K 72/48		40				516	140
JXA	W 38/23	I 128	20	17,0	6,0	5,0	220	128
	W 53/34		40				440	128
	W 38/23	T 128	20				220	36
	W 53/34		40				440	47

JORDAHL anchor channel JTA and JXA

Product description
Types of anchors – I-anchors and T-anchors

Annex A8

Fig. 1
Round anchor
forged

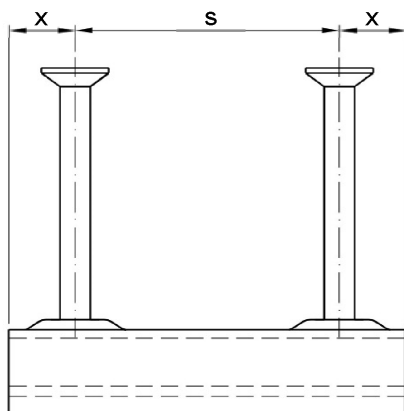


Fig. 2
Round anchor
welded

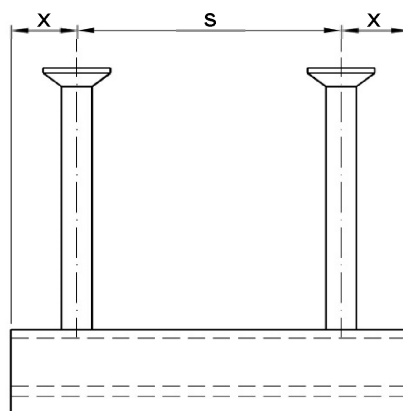


Fig. 3
I-anchor
welded

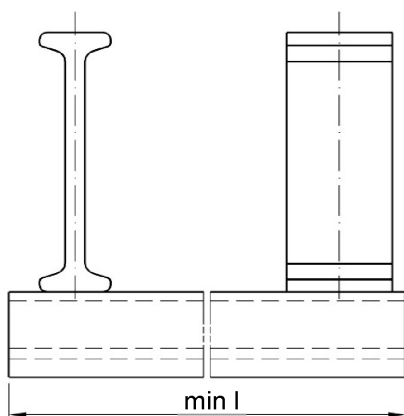


Fig. 4
T-anchor
welded

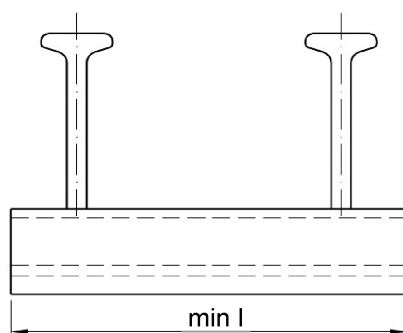


Table A6: Anchor positioning (JTA W and JTA K)

Anchor channel		Anchor spacing		End spacing	Min. channel length
		S _{min}	S _{max}	x	min l
		[mm]		[mm]	[mm]
JTA	K 28/15 K 38/17	50	200	25	100
	K 40/25 W 40/22 W 40+ K 50/30 W 50/30 W 50+	50	250	25	100
	K 53/34 W 53/34	80	250	35	150
	W 55/42	80	300	35	150
	K 72/48 W 72/48	100	400	35	150

JORDAHL anchor channel JTA and JXA

Product description
Anchor positioning and channel length (JTA W and JTA K)

Annex A9

Table A7: Anchor positioning (JXA)

Anchor channel		Anchor spacing		End spacing	Min. channel length
		S _{min}	S _{max}	x	min l
		[mm]		[mm]	[mm]
JXA	W 38/23	50	250	25	100
	W 53/34	80	250	35	150

JORDAHL anchor channel JTA and JXA

Product description
Anchor positioning and channel length (JXA)

Annex A10

Table A8: Dimensions of channel bolts

Anchor channel		Fig.	Channel bolt	Dimension [mm]			
				b ₁	b ₂	k	ø
JTA	K 28/15	1	JD	11,2	22,4	4,5	6
						4,5	8
						5,0	10
	K 38/17	1	JH	16,5	30,5	6,0	10
						7,0	12
	K 40/25 W 40/22 W 40+	2	JC	14,0	32,0	8,0	10
						8,0	12
						8,0	16
	W 40/22 W 40+	3	JKC	16,8	32,7	8,0	16
	K 50/30 W 50/30 W 50+ K 53/34 W 53/34	2	JB	17,0	41,5	9,0	10
						10,0	12
						11,0	16
		3	JKB	17,0	41,5	12,0	20
						13,5	20
	W 50/30 W 50+ W 53/34	2	JB	17,0	41,5	9,0	10
						10,0	12
						11,0	16
	K 72/48 W 72/48	2	JA	25,0	58,0	14,0	20
						20,0	24
						20,0	27
						20,0	30
JXA	W 38/23	4	JXH	17,2	28,9	8,0	12
						8,0	16
	W 53/34	4	JXB	21,0	41,6	11,5	16

Channel bolts JD, JH




Fig. 1

Channel bolts JA, JB, JC




Fig. 2

Double notching channel bolts JKB, JKC




Fig. 3

Serrated channel bolts JXH, JXB

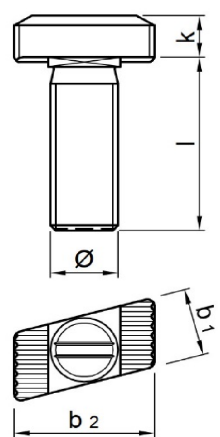


Fig. 4

Notch for marking the position

JORDAHL anchor channel JTA and JXA

Product description
Types of channel bolts – geometry

Annex A11

Table A9: Strength grades of bolts

Channel bolt		Carbon steel ¹⁾		Stainless steel ¹⁾	
Strength grade ²⁾		4.6	8.8	50	70
f _{uk}	[N/mm ²]	400	800	500	700
f _{yk}		240	640	210	450
Finish		electroplated, hot-dip galvanized		—	

¹⁾ Materials according to Annex A3 to A4, Table A1

²⁾ Material properties according to BS EN ISO 898-1: 2013

JORDAHL anchor channel JTA and JXA

Product description
Types of channel bolts – material

Annex A12

Specifications of intended use

Anchor channels and channel bolts subject to:

- Static and quasi-static loads in tension as well as shear perpendicular to the longitudinal axis of the channel and shear in the direction of the longitudinal axis of the channel.
- Fatigue cyclic tension loading.
- Fire exposure for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced normal weight concrete according to BS EN 206-1: 2013 + A2: 2021
- Strength classes C12/15 to C90/105 according to BS EN 206-1: 2013 + A2: 2021
- Cracked or uncracked concrete

Service conditions (environmental conditions):

- Structures subject to dry internal conditions (anchor channels and channel bolts according to Annex A3 and A4, Table A1, column 1 – 5).
- Structures subject to internal conditions with usual humidity (e.g., kitchen, bath and laundry in residential buildings, exceptional permanent damp conditions and applications under water) (anchor channels and channel bolts according to Annex A3 and A4, Table A1, column 2 – 5).
- According to BS EN 1993-1-4: 2006 + A2: 2020 relating to corrosion resistance class CRC III (anchor channels and channel bolts according to Annex A4, Table A1, column 3 – 5)
- According to BS EN 1993-1-4: 2006 + A2: 2020 relating to corrosion resistance class CRC IV (anchor channels and channel bolts according to Annex A4, Table A1, column 4 – 5)
- According to BS EN 1993-1-4: 2006 + A2: 2020 relating to corrosion resistance class CRC V (anchor channels and channel bolts according to Annex A4, Table A1, column 5)

Design:

- Anchor channels are designed under the responsibility on an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g., position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels are designed in accordance with EOTA TR 047 *Design of Anchor Channels*, March 2018, or BS EN 1992-4: 2018.
- For fatigue loading the anchor channels are designed in accordance with EOTA TR 050, October 2018 *Calculation Method for the performance of Anchor Channels under Fatigue Loading*, November 2015.
- The characteristic resistances are calculated with the minimum effective embedment depth.

JORDAHL anchor channel JTA and JXA

Intended use
Specifications

Annex B1


Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer – without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex A9, Table A6 and Annex A10, Table A7 are generated including end spacing and minimum channel length and only to be used in dry internal conditions (Annex A3 and A4, Table A1, column 1). For anchor channels made of stainless steel there are no restrictions regarding corrosion resistance when using cut channel pieces, if cutting is done professionally and contamination of cutting edges with corroding material is avoided.
- Installation in accordance with the installation instructions given in Annexes B8 and B9
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete under the head of the anchors is properly compacted. The channels are protected from penetration of concrete into the internal space of the channel.
- Washer may be chosen according to Annex A3 and provided separately by the user.
- Orientating the channel bolt (groove according to Annex A11) perpendicular to the channel axis.
- The required installation torques given in Annex B5 and B6 must be applied and must not be exceeded.

JORDAHL anchor channel JTA and JXA

Intended use
Specifications

Annex B2

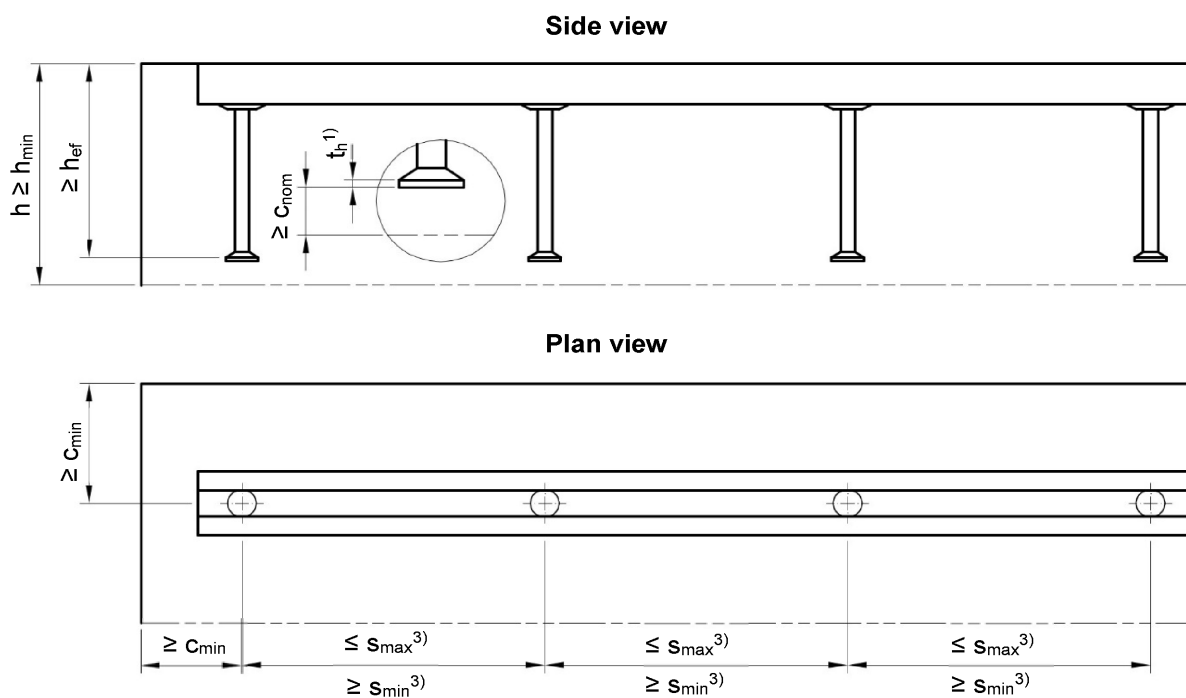

³⁾ s_{min} , s_{max} according to Annex A9, Table A6 and Annex A10, Table A7

Table B1: Minimum effective embedment depth, edge distance and member thickness (JTA W)

Anchor channel			JTA						
			W 40/22	W 40+	W 50/30	W 50+	W 53/34	W 55/42	W 72/48
Min. effective embedment depth round anchors and I-anchors	$h_{ef,min}$	[mm]	79	91	94	106	155	175	179
Min. edge distance round anchors and I-anchors	c_{min}		50	50	75	75	100	100	150
Min. member thickness round anchors and I-anchors	h_{min}		90	102	105	118	170	191	195
Min. member thickness in general	h_{min}		$h_{ef} + t_h^{1)} + c_{nom}^{2)}$						

¹⁾ t_h according to Annex A7, Table A4 and Annex A8, Table A5

²⁾ c_{nom} according to BS EN 1992-1-1: 2004 + A1: 2014

JORDAHL anchor channel JTA and JXA

Intended use
Installation parameters of anchor channels (JTA W)

Annex B3

Table B2: Minimum effective embedment depth, edge distance and member thickness (JXA)

Anchor channel			JXA	
			W 38/23	W 53/34
Min. effective embedment depth round anchors and I-anchors	$h_{ef,min}$	[mm]	95	155
Min. effective embedment depth T-anchors	$h_{ef,min}$		54	76
Min. edge distance round anchors and I-anchors	c_{min}		75	100
Min. edge distance T-anchors	c_{min}		50	100
Min. member thickness round anchors and I-anchors	h_{min}		120	190
Min. member thickness T-anchors	h_{min}		100	110
Min. member thickness in general	h_{min}		$h_{ef} + t_h^{1)} + c_{nom}^{2)}$	

¹⁾ t_h according to Annex A7, Table A4 and Annex A8, Table A5

²⁾ c_{nom} according to BS EN 1992-1-1: 2004 + A1: 2014

Table B3: Minimum effective embedment depth, edge distance and member thickness (JTA K)

Anchor channel			JTA					
			K 28/15	K 38/17	K 40/25	K 50/30	K 53/34	K 72/48
Min. effective embedment depth round anchors and I-anchors	$h_{ef,min}$	[mm]	45	76	79	94	155	179
Min. edge distance round anchors and I-anchors	c_{min}		40	50	50	75	100	150
Min. member thickness round anchors and I-anchors	h_{min}		55	87	90	105	170	195
Min. member thickness in general	h_{min}		$h_{ef} + t_h^{1)} + c_{nom}^{2)}$					

¹⁾ t_h according to Annex A7, Table A4 and Annex A8, Table A5

²⁾ c_{nom} according to BS EN 1992-1-1: 2004 + A1: 2014

JORDAHL anchor channel JTA and JXA

Intended use
Installation parameters of anchor channels (JXA and JTA K)

Annex B4

Table B4: Minimum spacing and installation torque of channel bolts (for JTA W and JTA K)

Anchor channel		JORDAHL T-bolt ø	Min. spacing of the channel bolt S _{min,cbo}	Installation torque T _{inst} ⁴⁾		
				General ²⁾ T _{inst,g}	Steel-steel contact ³⁾ T _{inst,s}	
				Steel 4.6; 8.8 ¹⁾ Stainless steel 50; 70 ¹⁾	Steel 4.6 ¹⁾ Stainless steel 50 ¹⁾	Steel 8.8 ¹⁾ Stainless steel 70 ¹⁾
				[Nm]		
JTA	K 28/15	6	30	3	3	8
		8	40	8	8	20
		10	50	13	15	40
		12	60	15	25	70
	K 38/17	10	50	15	15	40
		12	60	25	25	70
		16	80	40	65	180
	K 40/25 W 40/22 W 40+	10	50	15	15	40
		12	60	25	25	70
		16	80	45	65	180
	K 50/30 W 50/30 W 50+	10	50	15	15	40
		12	60	25	25	70
		16	80	60	65	180
		20	100	75	130	360
	K 53/34 W 53/34	10	50	15	15	40
		12	60	25	25	70
		16	80	60	65	180
		20	100	120	130	360
	W 55/42	10	50	15	15	40
		12	60	25	25	70
		16	80	60	65	180
		20	100	120	130	360
		24	120	200	230	620
	K 72/48 W 72/48	20	100	120	130	360
		24	120	200	230	620
		27	135	300	340	900
		30	150	380	460	1200

¹⁾ Materials according to Annex A2 to A4

²⁾ According to Annex B5, Fig. 1

³⁾ According to Annex B5, Fig. 2

⁴⁾ T_{inst} must not be exceeded

JORDAHL anchor channel JTA and JXA

Intended use

Installation parameters of channel bolts (for JTA W and JTA K)

Annex B5

Table B5: Minimum spacing and installation torque of channel bolts (for JXA)

Anchor channel		JORDAHL T-bolt Ø	Min. spacing of the channel bolt $s_{min,cbo}$	Installation torque $T_{inst}^{4)}$		
				General ²⁾ $T_{inst,g}$	Steel-steel contact ³⁾ $T_{inst,s}$	
				Steel 4.6; 8.8 ¹⁾ Stainless steel 50; 70 ¹⁾	Steel 4.6 ¹⁾ Stainless steel 50 ¹⁾	Steel 8.8 ¹⁾ Stainless steel 70 ¹⁾
				[Nm]		
JXA	W 38/23	12	60	70	— ⁵⁾	70
		16	80	120	— ⁵⁾	180
	W 53/34	16	80	180	— ⁵⁾	180
		20	100	300	— ⁵⁾	360

¹⁾ Materials according to Annex A2 to A4

²⁾ According to Annex B5, Fig. 1

³⁾ According to Annex B5, Fig. 2

⁴⁾ T_{inst} must not be exceeded

⁵⁾ Product not available

JORDAHL anchor channel JTA and JXA

Intended use
Installation parameters of channel bolts (for JXA)

Annex B6

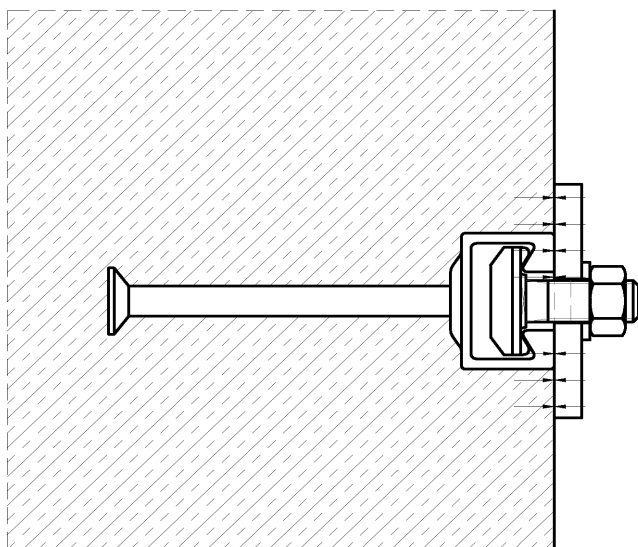


Fig. 1

General:

The fixture is in contact with the channel profile and the concrete surface. The installation torques according to Annex B5, Table B4 and Annex B6, Table B5 shall be applied and must not be exceeded.

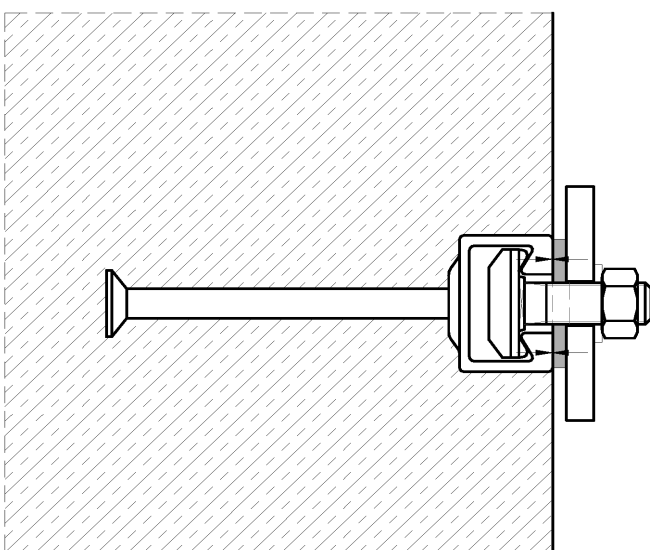


Fig. 2

Steel-steel contact:

The fixture is not in contact with the concrete surface. The fixture is fastened to the anchor channel by suitable steel part (e.g. washer). The installation torques according to Annex B5, Table B4 and Annex B6, Table B5 shall be applied and must not be exceeded.


JORDAHL anchor channel JTA and JXA

Intended use
Position of the fixture

Annex B7

1. Fixing anchor channel

Install the channel surface flush and fix the channel undisplaceable to the formwork or to the reinforcement.

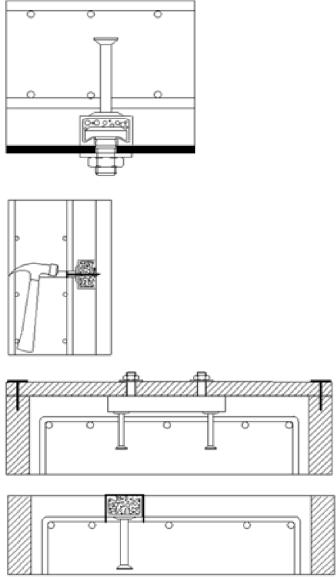

a) Fixing to steel formwork
With JORDAHL T-bolts and nuts, with rivets, cramps or with magnet fixings.

or

b) Fixing to timber formwork
With nails through the pre punched holes in the back of the channels and with staples.


or

c) Fixing to anchor channels at the top

- To timber batten on the side formwork (e.g. with JORDAHL T-bolts).
- Fixing from above directly to the reinforcement or to a mounting rebar, attach the channel by wire binding.


2. Pouring concrete and regular compacting of concrete

Compact the concrete properly around the channel and the anchors.




a) at side of member

or



b) at bottom of member


or

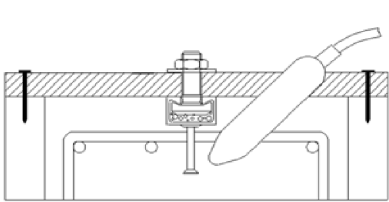

c) at top of member

3. Removing of the infill

Clean the channel on the outside after removing the formwork

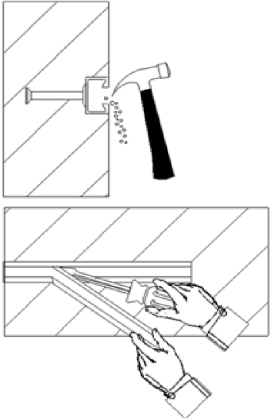

a) PS foam infill
With a hammer or a hook.

or

b) PE foam infill
By hand or with help of a screw driver in one piece.

JORDAHL anchor channel JTA and JXA

Intended use
Installation instruction anchor channels

Annex B8

4. Fastening the JORDAHL T-bolt to the JORDAHL anchor channel

Fig. 1


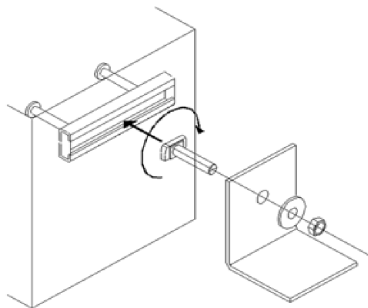


Fig. 2

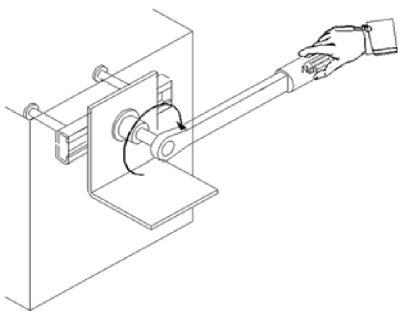

a) Installation torques (general)


1. Insert the JORDAHL T-bolt into the channel slot at any point along the channel length (Fig. 1).
2. Turn the channel bolt 90° clockwise and the head of the channel bolt locks into position (Fig. 1).
3. Do not mount the channel bolt at the end of the channel within the end spacing x according to Annex A9 and A10.
4. Use the washer under the nut (Fig. 1).
5. Check the correct fit of the channel bolt.
The groove on the shank end of the channel bolt must be perpendicular to the channel longitudinal axis.
6. Tighten the nuts to the installation torque according to Table 1 (Fig. 2). The installation torque must not be exceeded.

Table 1 – Installation torques (general)

Strength grade	Anchor channel		T _{inst} [Nm]								
			M6	M8	M10	M12	M16	M20	M24	M27	M30
Carbon steel 4.6, 8.8; Stainless steel 50, 70	JTA	K 28/15	3	8	13	15	-	-	-	-	-
		K 38/17	-	-	15	25	40	-	-	-	-
		K 40/25	-	-	15	25	45	-	-	-	-
		W 40/22	-	-	15	25	45	-	-	-	-
		W 40+	-	-	15	25	45	-	-	-	-
		K 50/30	-	-	15	25	60	75	-	-	-
		W 50/30	-	-	15	25	60	75	-	-	-
		W 50+	-	-	15	25	60	75	-	-	-
	K 53/34	-	-	15	25	60	120	-	-	-	
	W 53/34	-	-	15	25	60	120	-	-	-	
	W 55/42	-	-	15	25	60	120	200	-	-	
	K 72/48	-	-	-	-	-	120	200	300	380	
W 72/48	-	-	-	-	-	120	200	300	380		
JXA	W 38/23	-	-	-	70	120	-	-	-	-	
	W 53/34	-	-	-	-	180	300	-	-	-	

or

Fig. 3



b) Installation torques (steel-steel contact)

1. Use washers between the channel and the fixture to create a defined contact.
2. Tighten the nuts to the installation torque according to Table 2. The installation torque must not be exceeded.

Table 2 – Installation torques (steel-steel contact)

Strength grade	Anchor channel	T _{inst} [Nm]								
		M6	M8	M10	M12	M16	M20	M24	M27	M30
Steel 4.6; Stainless steel 50	JTA and JXA	3	8	15	25	65	130	230	340	460
Steel 8.8; Stainless steel 70		8	20	40	70	180	360	620	900	1200

JORDAHL anchor channel JTA and JXA

Intended use
Installation instruction channel bolts

Annex B9

Table C1: Characteristic resistances under tension load – Steel failure of anchor channel (JTA W)

Anchor channel			JTA						
			W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Steel failure: Anchor									
Characteristic resistance	N _{Rk,s,a}	[kN]	20	30	32	39	56	82	102
Partial factor	γ _{Ms} ¹⁾		1,8						
Steel failure: Connection between anchor and channel									
Characteristic resistance	N _{Rk,s,c}	[kN]	20	29	31	39	55	80	100
Partial factor	γ _{Ms,ca} ¹⁾		1,8						
Steel failure: Local flexure of channel lips									
Spacing of channel bolts for N _{Rk,s,l}	s _{l,N}	[mm]	79	79	98	98	105	109	144
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	38	38	43	43	72	110	120
Partial factor	γ _{Ms,l} ¹⁾		1,8						

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – steel failure anchor channels (JTA W)

Annex C1

Table C2: Characteristic resistances under tension load – Steel failure of anchor channel (JXA)

Anchor channel			JXA	
			W38/23	W53/34
Steel failure: Anchor				
Characteristic resistance	$N_{Rk,s,a}$	[kN]	31,4	51,7
Partial factor	$\gamma_{Ms}^{1)}$		1,8	
Steel failure: Connection between anchor and channel				
Characteristic resistance	$N_{Rk,s,c}$	[kN]	35,3	72,6
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8	
Steel failure: Local flexure of channel lips				
Spacing of channel bolts for $N_{Rk,s,l}$	$S_{l,N}$	[mm]	76	106
Characteristic resistance	$N^0_{Rk,s,l}$	[kN]	35,3	72,6
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8	

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – steel failure anchor channels (JXA)

Annex C2

Table C3: Characteristic resistances under tension load – Steel failure of anchor channel (JTA K)

Anchor channel			JTA					
			K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Steel failure: Anchor								
Characteristic resistance	N _{Rk,s,a}	[kN]	13	18	20	32	56	102
Partial factor	γ _{Ms} ¹⁾		1,8					
Steel failure: Connection between anchor and channel								
Characteristic resistance	N _{Rk,s,c}	[kN]	9	18	20	31	55	100
Partial factor	γ _{Ms,ca} ¹⁾		1,8					
Steel failure: Local flexure of channel lips								
Spacing of channel bolts for N _{Rk,s,l}	S _{l,N}	[mm]	56	76	80	100	107	144
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	9	18	20	31	55	100
Partial factor	γ _{Ms,l} ¹⁾		1,8					

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – steel failure anchor channels (JTA K)

Annex C3

Table C4: Characteristic flexural resistance of anchor channel (JTA W)

Anchor channel				JTA				
				W40/22 W40+	W50/30 W50+	W53/34	W55/42	W72/48
Steel failure: Flexure of channel								
Characteristic flexural resistance of channel	M _{Rk,s,flex} [Nm]	Round anchors, I-anchors	Carbon steel	1406	2830	3373	6447	8593
			Stainless steel	1580	3184	3445	— ²⁾	8775
Partial factor		γ _{Ms,flex} ¹⁾		1,15				

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C5: Characteristic flexural resistance of anchor channel (JXA)

Anchor channel				JXA	
				W38/23	W53/34
Steel failure: Flexure of channel					
Characteristic flexural resistance of channel	M _{RK,s,flex} [Nm]	Round anchors, I-anchors	Carbon steel	1598	4152
		T-anchors	Carbon steel	832	2476
Partial factor		γ _{Ms,flex} ¹⁾		1,15	

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – steel failure anchor channels (JTA W and JXA)

Annex C4

Table C6: Characteristic flexural resistance of anchor channel (JTA K)

Anchor channel				JTA					
				K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Steel failure: Flexure of channel									
Characteristic flexural resistance of channel	M _{Rk,s,flex} [Nm]	Round anchors, I-anchors	Carbon steel	317	580	1099	1673	2984	8617
			Stainless steel	324	593	1071	1708	2984	8617
Partial factor		γ _{Ms,flex} ¹⁾		1,15					
¹⁾ In absence of other national regulations									
JORDAHL anchor channel JTA and JXA								Annex C5	
Performance Characteristic resistances under tension load – steel failure anchor channels (JTA K)									

Table C7: Characteristic resistances under tension load – Steel failure of channel bolts

Channel bolt \varnothing				M6	M8	M10	M12	M16	M20	M24	M27	M30
Steel failure: Channel bolt												
Characteristic resistance ²⁾	N _{Rk,s}	[kN]	4,6 ¹⁾	8,0	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
			8,8 ¹⁾	16,1	29,3	46,4	67,4	125,6	196,0	282,4	367,2	448,8
			50 ¹⁾	10,1	18,3	29,0	42,2	78,5	122,5	176,5	229,5	280,5
			70 ¹⁾	14,1	25,6	40,6	59,0	109,9	171,5	247,1	321,3	392,7
Partial factor	$\gamma_{Ms}^{3)}$		4.6 ¹⁾	2,00								
			8.8 ¹⁾	1,50								
			50 ¹⁾	2,86								
			70 ¹⁾	1,87								

¹⁾ Materials according to Annex A2 to A4

²⁾ In conformity to BS EN ISO 898-1: 2013

³⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – steel failure channel bolts

Annex C6

Table C8: Characteristic resistances under tension load – Concrete failure of anchor channel (JTA W)

Anchor channel				JTA						
				W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Concrete failure: Pullout										
Characteristic resistance in cracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	10,8	17,3 (10,8) ²⁾	15,9	19,8	29,7	38,4	50,9
	I-anchor T-anchor			14,0	19,8	21,1	24,8	25,7	37,2	46,4
Characteristic resistance in uncracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	15,1	24,2 (15,1) ²⁾	22,3	27,7	41,6	53,8	71,3
	I-anchor T-anchor			19,7	27,7	29,5	34,7	36,0	52,1	65,0
Factor of N _{Rk,p} = N _{Rk,p} (C12/15) · ψ _c	C20/25	ψ _c	[-]	1,67						
	C25/30			2,08						
	C30/37			2,50						
	C35/45			2,92						
	C40/50			3,33						
	C45/55			3,75						
	C50/60			4,17						
	C55/67			4,58						
	≥C60/75			5,00						
Partial factor		γ _{Mp} ³⁾		1,5						
Concrete failure: Concrete cone										
Produkt factor k ₁		k _{Cr,N}		8,9 · (h _{ef,min} /180) ^{0,15 1)}						
		k _{ucr,N}		12,7 · (h _{ef,min} /180) ^{0,15 1)}						
Partial factor		γ _{Mc} ³⁾		1,5						
Concrete failure: Splitting										
Characteristic edge distance		C _{Cr,sp}		3h _{ef,min} ¹⁾						
Characteristic spacing		S _{Cr,sp}		6h _{ef,min} ¹⁾						
Partial factor		γ _{Msp} ³⁾		1,5						
1) h _{ef,min} according to Annex B3, Table B1 2) Values in brackets for stainless steel anchors 3) In absence of other national regulations										
JORDAHL anchor channel JTA and JXA									Annex C7	
Performance Characteristic resistances under tension load – concrete failure anchor channels (JTA W)										

Table C9: Characteristic resistances under tension load – Concrete failure of anchor channel (JXA)

Anchor channel				JXA	
				W38/23	W53/34
Concrete failure: Pullout					
Characteristic resistance in cracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	19,8	29,7
	I-anchor T-anchor			19,8	39,6
Characteristic resistance in uncracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	27,7	41,6
	I-anchor T-anchor			27,7	55,4
Factor of N _{Rk,p} = N _{Rk,p} (C12/15) · ψ _c	C20/25	ψ _c	[-]	1,67	
	C25/30			2,08	
	C30/37			2,50	
	C35/45			2,92	
	C40/50			3,33	
	C45/55			3,75	
	C50/60			4,17	
	C55/67			4,58	
	≥C60/75			5,00	
Partial factor		γ _{Mp} ²⁾		1,5	
Concrete failure: Concrete cone					
Produkt factor k ₁		k _{cr,N}		8,9 · (h _{ef,min} /180) ^{0,15 1)}	
		k _{ucr,N}		12,7 · (h _{ef,min} /180) ^{0,15 1)}	
Partial factor		γ _{Mc} ²⁾		1,5	
Concrete failure: Splitting					
Characteristic edge distance		C _{cr,sp}		3h _{ef,min} ¹⁾	
Characteristic spacing		S _{cr,sp}		6h _{ef,min} ¹⁾	
Partial factor		γ _{Msp} ²⁾		1,5	

¹⁾ $h_{ef,min}$ according to Annex B4, Table B2

²⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under tension load – concrete failure anchor channels (JXA)

Annex C8

Table C10: Characteristic resistances under tension load – Concrete failure of anchor channel (JTA K)

Anchor channel				JTA					
				K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Concrete failure: Pullout									
Characteristic resistance in cracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	6,7	14,7	10,8	15,9	29,7	50,9
	I-anchor T-anchor			11,7	11,7	14,0	21,1	25,7	46,4
Characteristic resistance in uncracked concrete C12/15	Round anchor	N _{Rk,p}	[kN]	9,4	20,6	15,1	22,3	41,6	71,3
	I-anchor T-anchor			16,4	16,4	19,7	29,5	36,0	65,0
Factor of N _{Rk,p} = N _{Rk,p} (C12/15) · ψ _c	C20/25	ψ _c	[-]	1,67					
	C25/30			2,08					
	C30/37			2,50					
	C35/45			2,92					
	C40/50			3,33					
	C45/55			3,75					
	C50/60			4,17					
	C55/67			4,58					
	≥C60/75			5,00					
Partial factor		γ _{Mp} ²⁾		1,5					
Concrete failure: Concrete cone									
Produkt factor k ₁		k _{Cr,N}		8,9 · (h _{ef,min} /180) ^{0,15 1)}					
		k _{ucr,N}		12,7 · (h _{ef,min} /180) ^{0,15 1)}					
Partial factor		γ _{Mc} ²⁾		1,5					
Concrete failure: Splitting									
Characteristic edge distance		C _{cr,sp}		3h _{ef,min} ¹⁾					
Characteristic spacing		S _{cr,sp}		6h _{ef,min} ¹⁾					
Partial factor		γ _{Msp} ²⁾		1,5					
1) h _{ef,min} according to Annex B4, Table B3 2) In absence of other national regulations									
JORDAHL anchor channel JTA and JXA									Annex C9
Performance Characteristic resistances under tension load – concrete failure anchor channels (JTA K)									

Table C11: Displacements under tension load (JTA W)

Anchor channel			JTA						
			W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Tension load	N	[kN]	7,9	11,5	12,3	15,5	21,8	31,7	39,7
Short-term displacement	δ_{N0}	[mm]	0,4	0,4	0,4	0,5	0,5	0,5	0,5
Long-term displacement	$\delta_{N\infty}$	[mm]	0,8	0,8	0,8	1,0	1,0	1,0	1,0

Table C12: Displacements under tension load (JXA)

Anchor channel			JXA	
			W38/23	W53/34
Tension load	N	[kN]	14,7	31,2
Short-term displacement	δ_{N0}	[mm]	1,0	0,9
Long-term displacement	$\delta_{N\infty}$	[mm]	2,0	1,8

Table C13: Displacements under tension load (JTA K)

Anchor channel			JTA					
			K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Tension load	N	[kN]	3,6	7,1	7,9	12,3	21,8	39,7
Short-term displacement	δ_{N0}	[mm]	0,3	0,3	0,4	0,4	0,5	0,5
Long-term displacement	$\delta_{N\infty}$	[mm]	0,6	0,6	0,8	0,8	1,0	1,0

JORDAHL anchor channel JTA and JXA

Performance
Displacements under tension load

Annex C10

Table C14: Characteristic resistances under shear load – Steel failure of anchor channel (JTA W)

Anchor channel			JTA						
			W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Steel failure: Anchor									
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	35	35	52	59	78	110	146
Partial factor	$\gamma_{Ms}^{1)}$		1,5						
Steel failure: Connection between anchor and channel									
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	35	35	52	59	78	110	146
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8						
Steel failure: Local flexure of channel lips									
Spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,V}$	[mm]	79	79	98	98	105	109	144
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	35	35	52	59	78	110	146
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8						

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – steel failure anchor channels (JTA W)

Annex C11

Table C15: Characteristic resistances under shear load – Steel failure of anchor channel (JXA)

Anchor channel			JXA	
			W38/23	W53/34
Steel failure: Anchor				
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	48,3	101,1
Characteristic resistance	$V_{Rk,s,a,x}$	[kN]	15,7	28,6
Partial factor	$\gamma_{Ms}^{1)}$		1,5	
Steel failure: Connection between anchor and channel				
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	48,3	101,1
Characteristic resistance	$V_{Rk,s,c,x}$	[kN]	17,7	36,3
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8	
Steel failure: Local flexure of channel lips				
Spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,V}$	[mm]	76	106
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	48,3	101,1
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8	
Characteristic resistance	$V_{Rk,s,l,x}$	[kN]	19,4	33,8
Installation factor	γ_{inst}		1,0	
Partial factor	$\gamma_{Ms,l,x}^{1)}$		1,8	

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – steel failure anchor channels (JXA)

Annex C12

Table C16: Characteristic resistances under shear load – Steel failure of anchor channel (JTA K)

Anchor channel			JTA					
			K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Steel failure: Anchor								
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	13	18	20	32	56	102
Partial factor	$\gamma_{Ms}^{1)}$		1,5					
Steel failure: Connection between anchor and channel								
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	9	18	20	31	55	100
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8					
Steel failure: Local flexure of channel lips								
Spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,V}$	[mm]	56	76	80	100	107	144
Characteristic resistance	$V_{Rk,s,l,y}^0$	[kN]	9	18	20	31	55	100
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8					

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – steel failure anchor channels (JTA K)

Annex C13

Table C17: Characteristic resistances under shear load – Concrete failure of anchor channel (JTA W)

Anchor channel			JTA					
			W40/22	W40+	W50/30	W50+	W53/34	W55/42
Concrete failure: Pry-out								
Product factor		k ₈	2,0					
Partial factor		γ _{Mc} ¹⁾	1,5					
Concrete failure: Concrete edge								
Product factor k ₁₂	cracked concrete	k _{cr,V}	7,5					
	uncracked concrete	k _{ucr,V}	10,5					
Partial factor		γ _{Mc} ¹⁾	1,5					

¹⁾ In absence of other national regulations

Table C18: Characteristic resistances under shear load – Concrete failure of anchor channel (JXA)

Anchor channel			JXA	
			W38/23	W53/34
Concrete failure: Pry-out				
Product factor	k_8	2,0 (1,0) ²⁾	2,0	
Partial factor	$\gamma_{Mc}^{1)}$	1,5		
Concrete failure: Concrete edge				
Product factor k_{12}	cracked concrete	$k_{cr,V}$	7,5 (5,6) ²⁾	7,5 (6,4) ²⁾
	uncracked concrete	$k_{ucr,V}$	10,5 (7,8) ²⁾	10,5 (8,9) ²⁾
Partial factor		$\gamma_{Mc}^{1)}$	1,5	

¹⁾ In absence of other national regulations

²⁾ Values in brackets for T-anchors

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – concrete failure anchor channels (JTA W and JXA)

Annex C14

Table C19: Characteristic resistances under shear load – Concrete failure of anchor channel (JTA K)

Anchor channel			JTA			
			K28/15	K38/17	K40/25	K50/30
Concrete failure: Pry-out						
Product factor		k ₈	1,0	2,0		
Partial factor		γ _{Mc} ¹⁾	1,5			
Concrete failure: Concrete edge						
Product factor k ₁₂	cracked concrete	k _{cr,V}	4,5	7,5		
	uncracked concrete	k _{ucr,V}	6,3	10,5		
Partial factor		γ _{Mc} ¹⁾	1,5			

¹⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – concrete failure anchor channels (JTA K)

Annex C15

Table C20: Characteristic resistances under shear loads – Steel failure of channel bolts

Channel bolt ø				M6	M8	M10	M12	M16	M20	M24	M27	M30
Steel failure: Channel bolt												
Characteristic resistance ²⁾	V _{Rk,s}	[kN]	4,6 ¹⁾	4,8	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
			8,8 ¹⁾	8,0	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
			50 ¹⁾	6,0	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
			70 ¹⁾	8,4	15,4	24,4	35,4	65,9	102,9	148,3	192,8	235,6
Characteristic flexural resistance	M ⁰ _{Rk,s}	[Nm]	4,6 ¹⁾	6,3	15,0	29,9	52,4	133,2	259,6	449,0	665,8	889,6
			8,8 ¹⁾	12,2	30,0	59,8	104,8 ³⁾	266,4 ⁴⁾	519,3	898,0	1331,5	1799,2
			50 ¹⁾	7,6	18,7	37,4	65,5	166,5	324,5	561,3	832,2	1124,5
			70 ¹⁾	10,7	26,2	52,3	91,7 ³⁾	233,1	454,4	785,8	1165,1	1574,3
Partial factor	γ _{Ms} ⁵⁾		4.6 ¹⁾	1,67								
			8.8 ¹⁾	1,25								
			50 ¹⁾	2,38								
			70 ¹⁾	1,56								

¹⁾ Materials according to Annex A2 to A4

²⁾ In conformity to BS EN ISO 898-1: 2013

³⁾ In combination with anchor channel K 28/15 limited to 85,5 Nm

⁴⁾ In combination with anchor channel K 38/17 limited to 234,0 Nm

⁵⁾ In absence of other national regulations.

JORDAHL anchor channel JTA and JXA

Performance

Characteristic resistances under shear load – steel failure channel bolts

Annex C16

Table C21: Displacements under shear load (JTA W)

Anchor channel			JTA						
			W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Shear load	V_y	[kN]	13,9	13,9	20,6	23,4	31,0	43,7	57,9
Short-term displacement	$\delta_{V,y,0}$	[mm]	0,6	0,6	0,6	0,6	1,2	1,2	1,2
Long-term displacement	$\delta_{V,y,\infty}$	[mm]	0,9	0,9	0,9	0,9	1,8	1,8	1,8

Table C22: Displacements under shear load (JXA)

Anchor channel			JXA	
			W38/23	W53/34
Shear load	V_y	[kN]	27,6	57,5
Short-term displacement	$\delta_{V,y,0}$	[mm]	9,1	11,1
Long-term displacement	$\delta_{V,y,\infty}$	[mm]	13,7	16,7
Shear load	V_x	[kN]	9,0	16,3
Short-term displacement	$\delta_{V,x,0}$	[mm]	4,8	3,1
Long-term displacement	$\delta_{V,x,\infty}$	[mm]	7,2	4,7

Table C23: Displacements under shear load (JTA K)

Anchor channel			JTA					
			K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Shear load	V_y	[kN]	3,6	7,1	7,9	12,3	21,8	39,7
Short-term displacement	$\delta_{V,y,0}$	[mm]	0,6	0,6	0,6	0,6	1,2	1,2
Long-term displacement	$\delta_{V,y,\infty}$	[mm]	0,9	0,9	0,9	0,9	1,8	1,8

JORDAHL anchor channel JTA and JXA

Performance
Displacements under shear load

Annex C17

Table C24: Characteristic resistances under combined tension and shear load (JTA W)

Anchor channel		JTA						
		W40/22	W40+	W50/30	W50+	W53/34	W55/42	W72/48
Steel failure								
Product factors	k ₁₃ , k ₁₄	Values are taken from BS EN 1992-4: 2018						

Table C25: Characteristic resistances under combined tension and shear load (JXA)

Anchor channel		JXA	
		W38/23	W53/34
Steel failure			
Product factors	k ₁₃ , k ₁₄	Values are taken from BS EN 1992-4: 2018	

Table C26: Characteristic resistances under combined tension and shear load (JTA K)

Anchor channel		JTA					
		K28/15	K38/17	K40/25	K50/30	K53/34	K72/48
Steel failure							
Product factor	k ₁₃ , k ₁₄	Values are taken from BS EN 1992-4: 2018					

JORDAHL anchor channel JTA and JXA

Performance
Characteristic resistances under combined tension and shear load

Annex C18

Table C27: Characteristic resistances under fire exposure

Anchor channel					JTA										
					K28/15	K38/17	K40/25	W40+	K50/30	W50+	K53/34	W55/42	K72/48		
							W40/22		W50/30		W53/34		W72/48		
Steel failure: Anchor, connection between anchor and channel, local flexure of channel lip, channel bolt															
Characteristic resistance	R30	M8	$N_{Rk,s,fi}$ = $V_{Rk,s,y,fi}$	[kN]	1,0	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾		
		M10			1,0	1,7	1,9	1,9	1,9	1,9	1,9	— ¹⁾	— ¹⁾		
		M12			1,9	1,7	<div>1,9 3,0</div>	3,0	2,5	2,5	2,5	— ¹⁾	— ¹⁾		
		M16			— ¹⁾	3,2	<div>3,6 7,8</div>	7,8	<div>4,0 6,0</div>	6,0	6,0	6,3	— ¹⁾		
		M20			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	<div>4,0 9,5</div>	9,5	<div>8,9 10,1</div>	10,3	10,3		
		M24			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	14,8	14,8		
	R60	M8			0,8	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	
		M10			0,8	1,5	1,5	1,5	1,5	1,5	1,5	— ¹⁾	— ¹⁾		
		M12			1,3	1,5	<div>1,5 2,6</div>	2,6	2,5	2,5	2,5	— ¹⁾	— ¹⁾		
		M16			— ¹⁾	2,4	<div>3,6 5,3</div>	5,3	<div>3,5 4,5</div>	4,5	4,5	4,8	— ¹⁾		
		M20			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	<div>3,5 7,1</div>	7,1	<div>6,5 7,5</div>	7,6	7,6		
		M24			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	11,1	11,1		
	R90	M8			0,6	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	
		M10			0,6	1,0	1,1	1,1	1,1	1,1	1,1	— ¹⁾	— ¹⁾		
		M12			0,7	1,0	<div>1,1 1,6</div>	1,6	1,6	1,6	1,6	— ¹⁾	— ¹⁾		
		M16			— ¹⁾	1,4	<div>2,0 2,9</div>	2,9	<div>2,5 3,0</div>	3,0	3,0	3,3	— ¹⁾		
		M20			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	<div>2,5 4,8</div>	4,8	<div>4,2 4,8</div>	4,9	4,9		
		M24			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	7,3	7,3		
		Partial factor			$\gamma_{Ms,fi}^{2)}$	1,0									

¹⁾ No performance assessed²⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance
 Characteristic resistances under fire exposure
Annex C19

Table C27 (continuation): Characteristic resistances under fire exposure

Anchor channel					JTA								
					K28/15	K38/17	K40/25	W40+	K50/30	W50+	K53/34	W55/42	K72/48
							W40/22		W50/30		W53/34		W72/48
Steel failure: Anchor, connection between anchor and channel, local flexure of channel lip, channel bolt													
Characteristic resistance	R120	M8	N _{RK,s,fi} = V _{RK,s,y,fi}	[kN]	0,5	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾
		M10			0,5	0,8	0,8	0,8	0,8	0,8	0,8	— ¹⁾	— ¹⁾
		M12			0,5	0,8	0,8	1,1	1,2	1,2	1,2	— ¹⁾	— ¹⁾
							1,1						
		M16			— ¹⁾	1,0	1,2	1,6	2,1	2,2	2,2	2,6	— ¹⁾
							1,6		2,3	2,3	2,3		
		M20			— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	2,1	3,6	3,0	3,6	3,6
M24	— ¹⁾	— ¹⁾	— ¹⁾	— ¹⁾	3,6	3,5							
Partial factor			γ _{Ms,fi} ²⁾		1,0								

¹⁾ No performance assessed²⁾ In absence of other national regulations

JORDAHL anchor channel JTA and JXA

Performance
 Characteristic resistances under fire exposure
Annex C20

Fig. 1

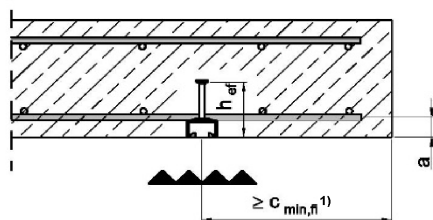


Fig. 2




Table C28: Minimum axis distance under fire exposure

Anchor channel				JTA						
				K 28/15	K 38/17	K 40/25 W 40/22 W 40+	K 50/30 W 50/30 W 50+	K 53/34 W 53/34	W 55/42	K 72/48 W 72/48
Minimum axis distance	R30	a	[mm]	35	35	35	35	50	50	50
	R60			35	35	35	35	50	50	50
	R90			45	45	45	45	50	50	50
	R120			60	60	60	60	65	70	70

¹⁾ Fire exposure from one side only. $c_{min,fi} = 2 h_{ef,min}$

²⁾ Fire exposure from more than one side. $c_{min,fi} = \text{MAX}(2 h_{ef,min}; 300 \text{ mm})$

JORDAHL anchor channel JTA and JXA

Performance
Concrete cover under fire exposure

Annex C21

Table C29: Combinations of anchor channels and channel bolts for fatigue tension loading

Anchor channel		Anchor		Channel bolt			
		Type	d_a (t _w) [mm]	Type	d	Strength grade	Surface
JTA	W 40/22	R	9,0	JC	M12	8.8	Electroplated, hot-dip galvanized
					M16	4.6, 8.8	
	W 40+		10,8	JC	M12	8.8	
					M16	4.6, 8.8	
	W 50/30		9,0	JB	M16, M20	4.6, 8.8	
	W 50+		10,0	JB	M16, M20	4.6, 8.8	
	W 53/34		11,5	JB	M16, M20	8.8	

Table C30: Characteristic resistances under fatigue tension load with n load cycles without static preload ($N_{Ed} = 0$) – Steel failure (Design method I according to EOTA TR 050, October 2018)

Anchor channel		JTA				
		W 40/22	W 40+	W 50/30	W 50+	W 53/34
Characteristic resistances under fatigue load in tension without static preload	Load cycles n	$\Delta N_{Rk,s,0,n}$ [kN]				
	$\leq 10^4$	11,7	12,8	16,5	16,5	22,2
	$\leq 10^5$	6,7	7,7	9,8	9,8	13,2
	$\leq 10^6$	3,8	4,7	5,8	5,8	7,9
	$\leq 2 \cdot 10^6$	3,2	4,0	4,9	4,9	6,7
	$\leq 5 \cdot 10^6$	2,6	3,3	4,0	4,0	5,5
	$\geq 10^8$	— ¹⁾				

¹⁾ No performance assessedTable C31: Reduction factor for concrete cone and pullout failure without static preload ($N_{Ed} = 0$) (Design method I according to EOTA TR 050, October 2018)

Anchor channel		JTA W
Reduction factor for $\Delta N_{Rk,c,0,n} = \eta_{c,fat} \cdot N_{Rk,c}$ ¹⁾ $\Delta N_{Rk,p,0,n} = \eta_{p,fat} \cdot N_{Rk,p}$ ²⁾	Load cycles n	$\eta_{k,c,fat} = \eta_{k,p,fat}$ [-]
	$\leq 10^4$	0,736
	$\leq 10^5$	0,665
	$\leq 10^6$	0,600
	$\leq 2 \cdot 10^6$	0,582
	$\leq 5 \cdot 10^6$	0,559
	$\leq 6 \cdot 10^7$	0,500
	$\leq 10^8$	0,500
	$\geq 10^8$	0,500

¹⁾ Static resistance according to Annex C7 and EOTA TR 047, March 2018 or BS EN 1992-4: 2018²⁾ Static resistance according to Annex C7

JORDAHL anchor channel JTA and JXA

Performance
 Characteristic resistances under fatigue tension load
 Design method I

Annex C22

Table C32: Characteristic limit resistances under fatigue tension load without static preload ($n \rightarrow \infty$, $N_{Ed} = 0$)
– Steel failure (Design method II according to EOTA TR 050, October 2018)

Anchor channel		JTA				
		W 40/22	W 40+	W 50/30	W 50+	W 53/34
Characteristic resistances under fatigue tension load	$\Delta N_{Rk,s,0,\infty}$ [kN]	— ¹⁾	3,3	4,0	4,0	5,5

¹⁾ No performance assessed

Table C33: Characteristic limit resistances under fatigue tension load without static preload ($n \rightarrow \infty$, $N_{Ed} = 0$)
– Concrete cone and pullout failure (Design method II according to EOTA TR 050, October 2018)

Characteristic resistances under fatigue tension load	$\eta_{c,fat} = \eta_{p,fat}$ [-]
$\Delta N_{Rk,c;0;\infty} = \eta_{c,fat} \cdot N_{Rk,c}$ ¹⁾	0,5
$\Delta N_{Rk,p;0;\infty} = \eta_{p,fat} \cdot N_{Rk,p}$ ²⁾	

¹⁾ Static resistance according to Annex C7 and EOTA TR 047, March 2018 or BS EN 1992-4: 2018

²⁾ Static resistance according to Annex C7

In absence of other national regulations, the following partial factors are recommended for design method I and II for all modes of failure (Table C30 to C33) according to EOTA TR 050: October 2018 and BS EN 1992-4: 2018

$\gamma_{Ms,fat} = 1,35$ (steel)

$\gamma_{Mc,fat} = \gamma_{Mp,fat} = 1,50$ (concrete)

JORDAHL anchor channel JTA and JXA

Performance
Characteristic resistances under fatigue tension load
Design method II

Annex C23



British Board of Agrément,
Bucknalls Lane,
Watford,
Hertfordshire
WD25 9BA